www.imopacific.com.au
Sales@imopacific.com.au

Changeover Switches 3-pole



63A **22kW** 97x45 LTS63 SMA U3

Technical Data

Data according to IEC 947-3, IEC 947-5-1, VDE 0660, EN 60947-3, EN 60947-5-1

Type				LTS63
Main contacts				
Rated thermal current I_{th} open			A	63
Rated thermal current I_{the} enclosed			A	63
Rated insulation voltage U_i [1]			V	690
Rated operational current I_e AC21A			A	63
Making capacity I_{eff}		3x380-440V	A	370
Breaking capacity		3x220-240V	A	330
		3x380-440V	A	330
		3x660-690V	A	190
Disconnection property performed up to			V	690
Motor Switch	AC3	3x400V	A	37
Motor Switch	AC3	3x220-240V	kW	11
Direct switching of single motors		3x380-440V	kW	18,5
		3x660-690V	kW	18,5
Main Switch	AC23	3x400V	A	45
Motor Switch,	AC23A,	3x220-240V	kW	15
Main Switch,	AC23B	3x380-440V	kW	22
Safety Switch		3x660-690V	kW	18,5

ON-OFF Switches 6-pole, 8-pole
Changeover Switches 3-pole, 4-pole

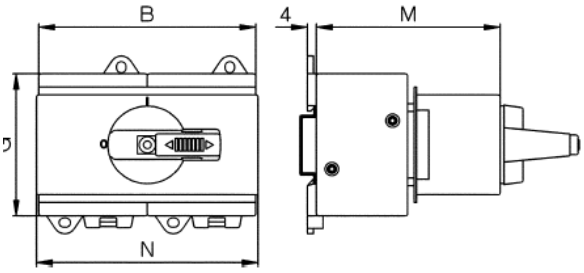

B=62.5mm, G=64mm, N=97mm, M=74mm